

3 Phase Instant Electric Hot Water Heaters



- **LCD Screen**
 - + Clearly displays inlet and outlet water temperatures, the percentage of max. power the unit currently heats, and the water flow rate.
- **Electronic Control**
 - + Ensures stability and smooth regulation of the water temperature between 30° to 60°C. With 1°C steps.
- **Temperature Lock**
 - + Allows the user to save the maximum temperature value (Child safety lock).
- **Temperature Memory Function**
 - + Allows the user to save the 3 most frequently used water temperatures.
- **No Flue required**

Application



Kitchen sink



Shower





Bath



Bathroom sink/basin

Dimensions

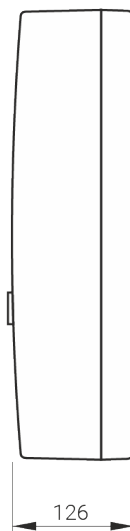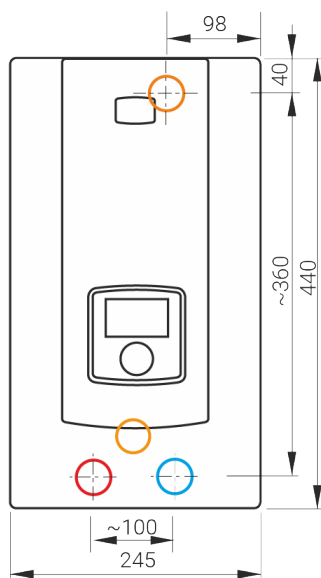

Inlet and outlet section G 1/2"

● cold water inlet

● hot water inlet

● electric cable connection point

Download technical drawings via QR code:



Specifications

Model	HF-318	HF-321	HF-324	HF-327
Product No.	2850318	2850321	2850324	2850327
Type	Instantaneous	Instantaneous	Instantaneous	Instantaneous
Voltage, V	415V	415V	415V	415V
Rated Power, kW	18	21	24	27
Rated Current, A	25.1	29.2	33.4	37.6
Hot Water Delivery, L/min (at T = 30°C)	8.7	10.1	11.6	11.3
Min. Flow Rate, L/min	2.5	2.5	2.5	2.5
Max Inlet Pressure Rating, kPa	1000	1000	1000	1000
Temperature Range, °C	30° - 60°	30° - 60°	30° - 60°	30° - 60°
Dimensions (H x W x D) mm	440 x 245 x 126	440 x 245 x 126	440 x 245 x 126	440 x 245 x 126
Weight, kg	4	4	4	4
IP Rating	IP24	IP24	IP24	IP24
Water Connections	G 1/2" Female	G 1/2" Female	G 1/2" Female	G 1/2" Female
Element Type	Bare Element	Bare Element	Bare Element	Bare Element
Min Water Resistivity, (at 15°C)	1100	1100	1100	1100
Pressure Range @ Main Water (MPa)	0.1 - 1	0.1 - 1	0.1 - 1	0.1 - 1
Approvals	WM 40268 (AS 3498)	WM 40268 (AS 3498)	WM 40268 (AS 3498)	WM 40268 (AS 3498)

V2.0 05/2023

