




### Features

- 100% Pressure Tested
- High quality brass construction
- Working Temperature 0°C to 60°C
- Maximum operating pressure @ nominal temperature 2550 kPa
- Approved by the Australian Gas Association for use with Natural Gas and LPG
- For use with manual gas regulators

### Certifications

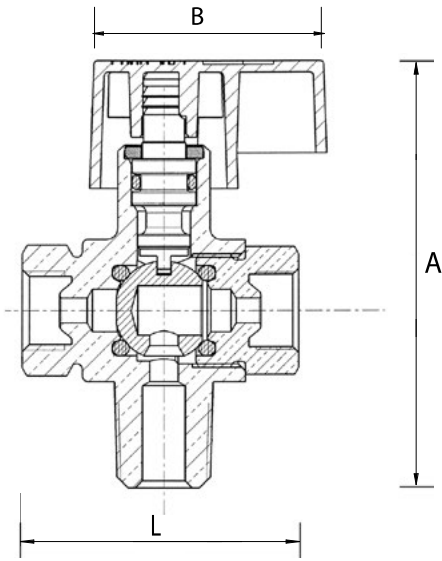

### Specifications

Part No.	Type	Connection		AGA Approval No.	Dimensions (mm)			Pack Qty
		Inlet	Outlet		A	B	L	
1210302	Female Flare	2 x 7/16" Inverted flare	1/4" NPT	4028	60	32	39	10